


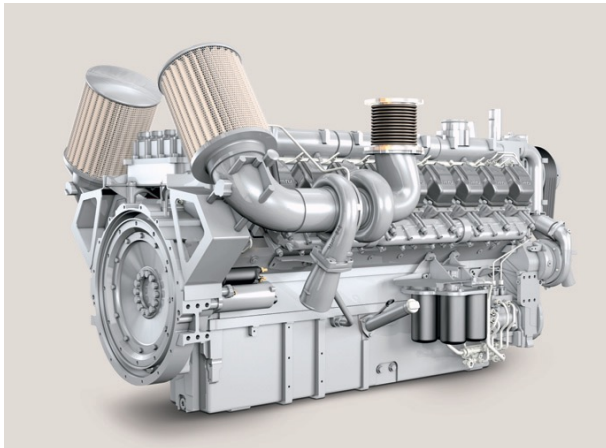

Series 2000 Gx6

For Power Generation
Continuous Applications
with air-to-air charge air
cooling

Engine Type	12V2000 B26F	
Rated power ICXN	665 kW	892 bhp
Speed at rated power ICXN	1500 rpm	
Number of cylinders	12V - 90°	
Bore mm - in	135 mm	5.3 in
Stroke mm - in	156 mm	6.15 in
Displacement per cylinder l : cu - in	2.33 cu	136 in
Displacement, total l : cu - in	26.76 cu	1633 in
Fuel specification	EN 590, Grade No.1-D/2-D (ASTM D975-00)	

Engine Dimensions

12V2000 B26F		
Dimensions (L x W x H) mm - in	2038 x 1548 x 1421 mm	80 x 61 x 56 in
Dry weight kg - lbs	2670 kg	5586 lbs

Engine Type	16V2000 B26F	
Rated power ICXN	709 kW	951 bhp
Speed at rated power ICXN	1500 rpm	
Number of cylinders	16V - 90°	
Bore mm - in	135 mm	5.3 in
Stroke mm - in	156 mm	6.15 in
Displacement per cylinder l : cu - in	2.33 cu	136 in
Displacement, total l : cu - in	35.68 cu	2177 in
Fuel specification	EN 590, Grade No.1-D/2-D (ASTM D975-00)	

Engine Dimensions

16V2000 B26F		
Dimensions (L x W x H) mm - in	2388 x 1570 x 1421 mm	94 x 62 x 56 in
Dry weight kg - lbs	3125 kg	6889 lbs

Engine Type	18V2000 B26F
-------------	--------------

Rated power ICXN	887 kW	1189 bhp
Speed at rated power ICXN	1500 rpm	
Number of cylinders	18V - 90°	
Bore mm - in	135 mm	5.3 in
Stroke mm - in	156 mm	6.15 in
Displacement per cylinder l : cu - in	2.33 cu	136 in
Displacement, total l : cu - in	40.14 cu	2450 in
Fuel specification	EN 590, Grade No.1-D/2-D (ASTM D975-00)	

Engine Dimensions

18V2000 B26F

Dimensions (L x W x H) mm - in	2569 x 1572 x 1421 mm	101 x 62 x 56 in
Dry weight kg - lbs	3360 kg	7408 lbs

Website: www.pps-bv.nl