


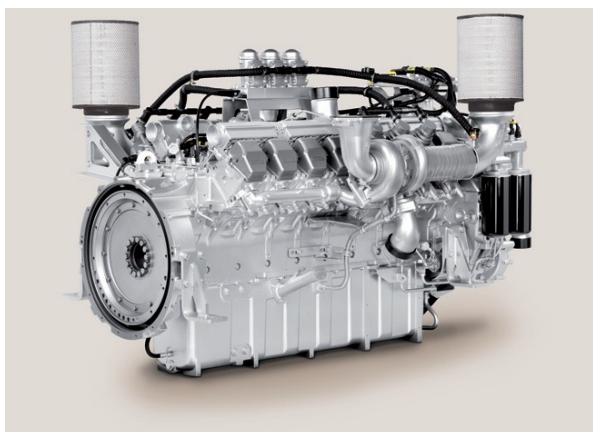

Series 2000 Gx5

For Power Generation Prime Applications
with water-to-air charge air cooling

Engine Type

12V2000 G25

Rated power ICXN	580 kW	778 bhp
Speed at rated power ICXN	1500 rpm	
Number of cylinders	12V - 90°	
Bore mm - in	130 mm	5.1 in
Stroke mm - in	150 mm	5.9 in
Displacement per cylinder l : cu - in	1.99 cu	121 in
Displacement, total l : cu - in	23.9 cu	1458 in
Fuel specification	EN 590, Grade No.1-D/2-D (ASTM D975-00)	

Engine Dimensions

12V2000 G25

Dimensions (L x W x H) mm - in	1835 x 1580 x 1570 mm	72 x 62 x 62 in
Dry weight kg - lbs	2570 kg	5665 lbs

Engine Type

16V2000 G25

Rated power ICXN	810 kW	1086 bhp
Speed at rated power ICXN	1500 rpm	
Number of cylinders	16V - 90°	
Bore mm - in	130 mm	5.1 in
Stroke mm - in	150 mm	5.9 in
Displacement per cylinder l : cu - in	1.99 cu	121 in
Displacement, total l : cu - in	31.8 cu	1944 in
Fuel specification	EN 590, Grade No.1-D/2-D (ASTM D975-00)	

Engine Dimensions

16V2000 G25

Dimensions (L x W x H) mm - in	2180 x 1580 x 1580 mm	86 x 62 x 62 in
Dry weight kg - lbs	3180 kg	7010 lbs

Engine Type

18V2000 G65

Rated power ICXN	1000 kW	1341 bhp
------------------	---------	----------

Speed at rated power ICXN	1500 rpm	
Number of cylinders	18V - 90°	
Bore mm - in	130 mm	5.1 in
Stroke mm - in	150 mm	5.9 in
Displacement per cylinder l : cu - in	1.99 cu	121 in
Displacement, total l : cu - in	35.8 cu	2185 in
Fuel specification	EN 590, Grade No.1-D/2-D (ASTM D975-00)	

Engine Dimensions

18V2000 G65

Dimensions (L x W x H) mm - in	2350 x 1580 x 1600 mm	93 x 62 x 63 in
Dry weight kg - lbs	3580 kg	7893 lbs

Website: www.pps-bv.nl