


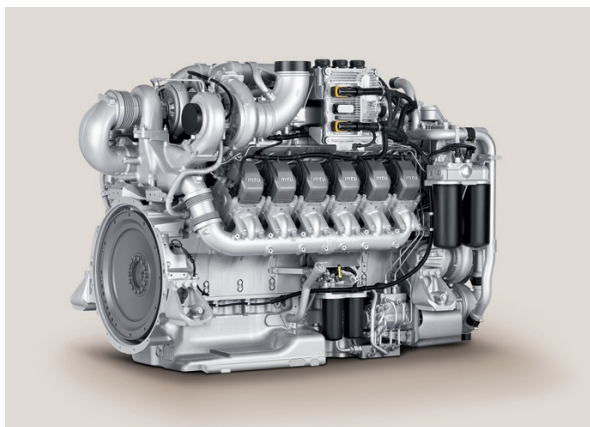

Series 2000 Gx6

For Power Generation Prime Applications
with water-to-air charge air cooling

Engine Type

12V2000 G56F

Rated power ICXN	665 kW	892 bhp
Speed at rated power ICXN	1500 rpm	
Number of cylinders	12V - 90°	
Bore mm - in	135 mm	5.3 in
Stroke mm - in	156 mm	6.15 in
Displacement per cylinder l : cu - in	2.33 cu	136 in
Displacement, total l : cu - in	26.76 cu	1633 in
Fuel specification	EN 590, Grade No.1-D/2-D (ASTM D975-00)	

Engine Type

12V2000 G66F

Rated power ICXN	709 kW	951 bhp
Speed at rated power ICXN	1500 rpm	
Number of cylinders	12V - 90°	
Bore mm - in	135 mm	5.3 in
Stroke mm - in	156 mm	6.15 in
Displacement per cylinder l : cu - in	2.33 cu	136 in
Displacement, total l : cu - in	26.76 cu	1633 in
Fuel specification	EN 590, Grade No.1-D/2-D (ASTM D975-00)	

Engine Dimensions

12V2000 G56F - G66F

Dimensions (L x W x H) mm - in	1830 x 1280 x 1430 mm	72 x 50 x 56 in
Dry weight kg - lbs	2950 kg	6503 lbs

Website: www.pps-bv.nl